



World's First
Super Premium
Efficiency
Gear Motors for
Explosion
Hazardous Areas



 **Bauer Gear Motor**[®]
Altra Industrial Motion

Boosting energy efficiency with variable speed drives

EU Regulation 640/2009/EC exempts motors for use in explosion hazardous areas from the minimum efficiency requirements for placing new products on the market, because explosion protection takes precedence over the energy savings that can be achieved with motors. This does not mean that there is no potential for energy savings with the electric motors used in the chemical industry. This is why the VIK pamphlet „VIK Recommendation 1: Three-Phase Induction Motors – Technical Requirements“ recommends the use of efficiency class IE2 (High Efficiency) for motors with explosion protection types Ex d and Ex nA and efficiency class IE1 (Standard Efficiency) for motors with explosion protection type Ex e.

For many years, only encapsulated motors (type Ex d) could be used for variable speed operation in explosion hazardous areas. With the launch of motors with explosion protection type Ex e for use next to the inverter, customers now have a economical alternative to encapsulated motors when procuring motors for use in explosion hazardous areas. Variable speed drives create opportunities for major energy savings. For applications in

explosion hazardous areas as well as other areas, retrofitting frequency inverters in existing plants and achieving higher energy savings by using highly efficient motors are both attractive options. Most currently available variable-speed three-phase induction motors with explosion protection type Ex e are only available in standard efficiency class IE1. This means that potential energy savings are only partially utilised.

For the **first time ever**, the S series of permanent magnet synchronous geared motors (PMSM) from **Bauer Gear Motor GmbH** offers variable-speed motors in **efficiency class IE4*** for use in explosion hazardous areas. This is the highest energy efficiency that can be achieved with the current state of motor technology.

Bauer Gear Motor GmbH helps amongst others the chemical industry fully exploit potential energy savings with high efficiency IE4 motors, even at the highest level.

Motor data

Type	Design							
	1500 1/min				3000 1/min			
	Speed 1/min	Power kW	Torque Nm	Current A	Speed 1/min	Power kW	Torque Nm	Current A
S..08MA4	150	0,08	5	1,9	150	0,08	5	3,7
	500	0,29	5,6	2,1	500	0,29	5,6	4,1
	1000	0,68	6,5	2,3	1000	0,7	6,5	4,7
	1500	1	6,5	2,3	3000	2	6,5	4,7
	1800	1,2	6,5	2,3	3600	2,5	6,5	4,7
S..08LA4	150	0,1	6,5	2,5	150	0,1	6,5	5,2
	500	0,42	8,0	3,0	500	0,42	8,0	5,9
	1000	1	9,55	3,5	1000	1	9,55	7,0
	1500	1,5	9,55	3,5	3000	3	9,55	7,0
	1800	1,8	9,55	3,5	3600	3,6	9,55	7,0
S..09SA4	150	0,13	8	2,5	150	0,13	8	5,2
	500	0,53	10	3,2	500	0,53	10	6,4
	1000	1,36	13	4,0	1000	1,36	13	8,25
	1500	2	13	4,0	3000	4	13	8,25
	1800	2,2	11,5	4,0	3600	4,15	11	7,3
S..09XA4	150	0,2	13	4,0	150	0,196	12,5	8,0
	500	0,84	16	5,0	500	0,84	15,7	9,9
	1000	2,1	20	6,3	1000	2,1	20	12,5
	1500	3,1	20	6,3	3000	6,3	20	12,5
	1800	3,6	19	6,3	3600	5,5	14,5	9,2
S..11SA6	150	0,28	18	5,6	150	0,28	18	12
	500	1	20	6,2	500	1	20	13,3
	1000	2,4	22,5	7,0	1000	2,4	22,5	15
	1500	3,5	22,5	7,0	3000	7,1	22,5	15
	1800	6,1	22,5	7,0	3600	8,5	22,5	15
S..11MA6	150	0,42	26,5	8,5	150	0,42	26,5	17
	500	1,6	30	9,5	500	1,6	30	19,3
	1000	3,7	35	11	1000	3,7	35	22,5
	1500	5,5	35	11	3000	11	35	22,5
	1800	6,5	35	11	3600	12,9	34,3	22,5
S..11LA6	150	0,51	32,5	9,8	150	0,5	32,5	20
	500	2	39,4	12	500	2,1	39,4	24
	1000	5	48	14,7	1000	5	48	30
	1500	7,5	48	14,7	3000	15	48	30
	1800	9	47,5	14,7	3600	15	40	25,8

PMSM S-series in IE4* for explosion hazardous areas

Design torque M_N :

5 Nm – 48 Nm

Rated power P_N :

0,75 kW – 15 kW

Protection type

Increased Safety – Zone 1

⊕ II 2 G Ex e IIC T1 - T3 Gb

S.XE.08MA4

S.XE.08LA4

S.XE.09SA4

S.XE.09XA4

S.XE.11SA6

S.XE.11MA6

S.XE.11LA6

Dust explosion protection - Zone 21

⊕ II 2 D Ex tb IIC T 160°C ... 120° Db

S.XC.08MA4

S.XC.08LA4

S.XC.09SA4

S.XC.09XA4

S.XC.11SA6

S.XC.11MA6

S.XC.11LA6



* The data corresponds to the characteristic curve of the motor, lower efficiency classes as IE4 can occur at the rated point.


Inverter Settings

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % x I_N
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	up to 180 Hz, depending on motor design
Permissible operating time below f_{min} :	60 s (in open loop mode)

All other settings must be selected according to the requirements of the drive. The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes. Non-standard operating conditions are available on request.

Frequency-dependent current limit

The continuous current limit of the frequency inverter must be set in accordance with the current versus frequency diagram (motor type example below S..08LA4-3000 rpm).

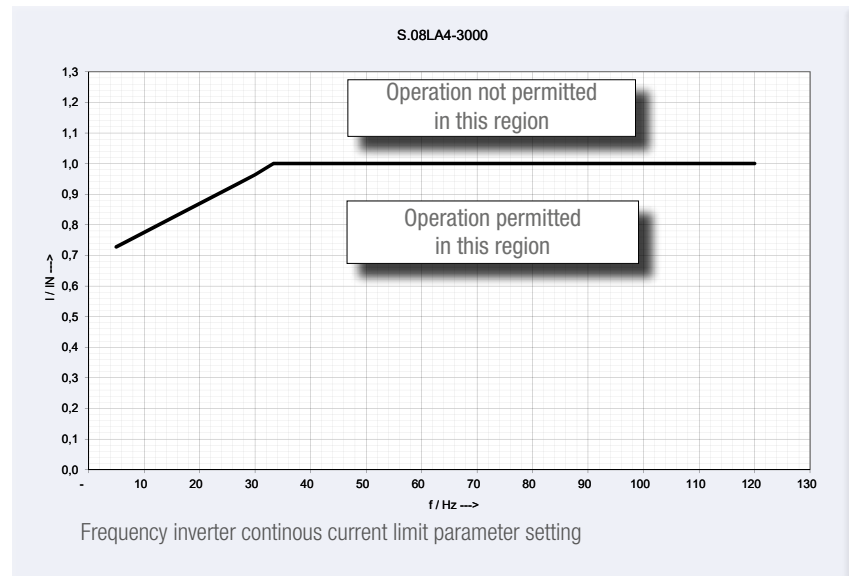

Investment security for the future

Electrically driven machinery accounts for around 70 % of overall energy demand for industrial consumption. Energy savings of 135 billion kilowatt-hours per year would be possible within Europe with the use of modern drive systems.

Bauer Gear Motor GmbH pursues its goals with minimum consumption of raw materials and energy, the lowest possible environmental impact, and efficient utilisation of resources. This philosophy is reflected in our product strategy, and we want to share it with our customers in

What we offer

- 90 years of experience in drive technology
- Advice from gear motor specialists
- A high level of engineering expertise for custom drive solutions
- A high level of application expertise
- Global availability
- Exceptional flexibility
- A broad product spectrum
 - Pioneering technologies for energy-efficient drives
 - Standard Efficiency (IE1) and Premium Efficiency (IE3) with standard induction motor technology
 - Super Premium Efficiency (IE4) – the highest efficiency class technologically possible – with permanent magnet synchronous motors (PMSMs)
- Sector-specific solutions as standard

... for your benefits

- A partner on your side:
 - that speaks your language
 - that understands you
 - that gives top priority to customer satisfaction
- More added value by using:
 - The Bauer brand, with
 - a good reputation worldwide
 - sturdy and durable drives
 - a high enclosure protection rating of IP65 as standard lying above the market standard
 - extremely high quality awareness
 - Products that are tailored to your applications and give you the benefit of:
 - our expertise as drive manufacturers for over 85 years
 - our knowledge of the industry
 - Higher flexibility
 - adaptation of standard drives to your needs
 - fast time to market for product launch with custom drive solutions (SSD)
- Expert advice for fully exploiting potential energy savings
- Acquiring technology leadership by using IE4 motors
- Achieving investment security by complying with statutory provisions for energy efficiency extending beyond 2017

Bauer Gear Motor Facilities

Europe

Germany
Eberhard-Bauer-Strasse 37
73734 Esslingen - Germany
+49 711 3518 0

Slovakia
Tovarenská 49
953 01 Zlate Moravce - Slovakia
+421 37 6926100

United Kingdom
Nat Lane Business Park
Winsford, Cheshire
CW7 3BS - United Kingdom
+44 1606 868600

North America

Middlesex, NJ
T476 Union Ave.
Middlesex, NJ 08846-1968 - USA
+1 732 469 8770

Charlotte, NC
701 Carrier Drive
Charlotte, NC 28216 - USA
+1 800 825 6544

Asia Pacific

China
18 Huan Zhen Road Dabo
Industrial Zone - BoGoang Village
ShaJing Town - BaoAn District
Guangdong Province
518104 Shenzhen City - China
+86 755 27246308

Customer Service

Benelux
Brussel (Anderlecht)
+32 2 5295941

Finland
01510 Vantaa
+358 207 189700

France
Brussel (Anderlecht)
+32 2 5295941

Italy
Grisignano di Zocco (VI)
+39 0444 414392

Russia
Volokolamskoye sh., 142, bldg 6
Business Center „Irbis“
125464 Moscow - Russia
+7 495 6420468

The Brands of Altra Industrial Motion

Couplings

Ameridrives
www.ameridrives.com

Bibby Turboflex
www.bibbyturboflex.com

Guardian Couplings
www.guardiancouplings.com

Huco
www.huco.com

Lamiflex Couplings
www.lamiflexcouplings.com

Stromag
www.stromag.com

TB Wood's
www.tbwoods.com

Geared Cam Limit Switches

Stromag
www.stromag.com

Electric Clutches & Brakes

Inertia Dynamics
www.idicb.com

Matrix
www.matrix-international.com

Stromag
www.stromag.com

Warner Electric
www.warnerelectric.com

Linear Products

Warner Linear
www.warnerlinear.com

Engineered Bearing Assemblies

Kilian
www.kilianbearings.com

Heavy Duty Clutches & Brakes

Industrial Clutch
www.indclutch.com

Twiflex
www.twiflex.com

Stromag
www.stromag.com

Svendborg Brakes
www.svendborg-brakes.com

Wichita Clutch
www.wichitaclutch.com

Belted Drives

TB Wood's
www.tbwoods.com

Gearing

Bauer Gear Motor
www.bauergears.com

Boston Gear
www.bostongear.com

Delroyd Worm Gear
www.delroyd.com

Nuttall Gear
www.nuttallgear.com

Overrunning Clutches

Formsprag Clutch
www.formsprag.com

Marland Clutch
www.marland.com

Stieber
www.stieberclutch.com

Bauer assumes no liability or responsibility for misprints and errors in catalogues, brochures and other printed documentation. Bauer reserves the right to make changes to products without prior notice, including to products that have already been ordered, unless contractual technical specifications are affected by such changes. All trademarks in these publications are the sole and exclusive property of the relevant companies. Bauer and the Bauer logo are trademarks of Bauer Gear Motor GmbH. Images are only illustrative and may differ from the delivered product depending on the configuration ordered. Technical data and specifications are precise at the time of issue and may be subject to change. All rights reserved.

Images: Fotolia, Adobe Stock, Altra and Bauer Archives